

NPE 2018



HIGHLIGHTS


World's Smallest Hot Runner Nozzle

- ▶ Minimum 4.5 mm spacing
- ▶ Hot Tip or Valve Gate
- ▶ Commodity or Engineering Resin capable
- ▶ Separate Heater & T/C control
- ▶ Reduces Mold Base size
- ▶ Ideal for short residence time requirements
- ▶ Nozzle can easily bypass features on the cavity side such as core inserts waterlines



[Click here for more](#)

New Generation Electric Valve Gate Controller Visio VDC 2

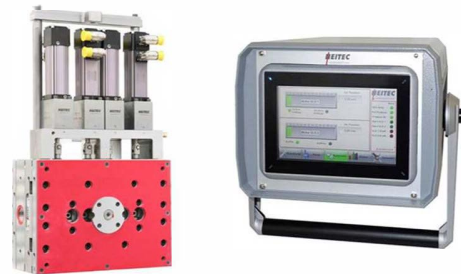

- ▶ Easy operation, clearly arranged user interface
- ▶ Optimised calibration process during startup of the mould
- ▶ Suitable for networking allowing remote maintenance and remote diagnosis
- ▶ Minimizing abrasion of the needle and injection point with a graduated travel profile
- ▶ Several drives controllable with only one VDC 2 and with separate input signals

[Click here for more](#)

Star Line Edge Gate Free Dimensional®



- ▶ Advanced Edge Gate solutions
- ▶ Superior thermal profile with dual zones
- ▶ Variable Tip exit levels
- ▶ Easy Assembly without cavity splitting

[Click here for more](#)

Skinny X-Slim® Nozzle for Large Shot Weights



- ▶ Very small installation diameters with extra large flow channel diameters
- ▶ Maximum material throughput for given area
- ▶ Nozzles available with 3 different diameters
- ▶ Suitable for a wide range of resins
- ▶ Hot Tip or Valve Gate
- ▶ Commodity or Engineering Resin capable
- ▶ Replaceable Tips and Thermocouples

[Click here for more](#)



Technoject Machinery Corp
Tel: 905-951-7144 Fax 905-951-7147
info@technoject.com
www.technoject.com